

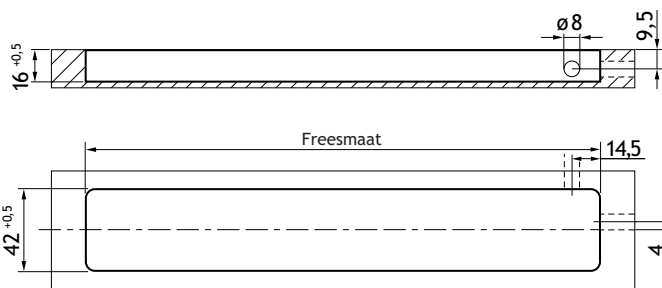


OMSCHRIJVING	LENGTE	FREESMAAT	° KELVIN	WATTAGE	CODE
LD 8010 EF inbouwprofiel 230V	334 mm	327 mm	3000° K	6 W	6348-8433
	434 mm	427 mm	3000° K	7,50 W	6348-8443
	535 mm	528 mm	3000° K	9,50 W	6348-8453
	839 mm	832 mm	3000° K	14,50 W	6348-8483
	939 mm	932 mm	3000° K	16 W	6348-8493
LED inbouwprofiel met 2 m aansluitkabel met ministekker.					
- Om in te frezen. - Zichtbare hoogte: 3,3 mm - Geschikt voor 19 mm plaatdikte. - Uitvoering: alu - Aansluiting: 230V	334 mm	327 mm	4000° K	6 W	6348-8434
	434 mm	427 mm	4000° K	7,50 W	6348-8444
	535 mm	528 mm	4000° K	9,50 W	6348-8454
	839 mm	832 mm	4000° K	14,50 W	6348-8484
	939 mm	932 mm	4000° K	16 W	6348-8494




Extra te bestellen
Mini-stekker systeem

6a

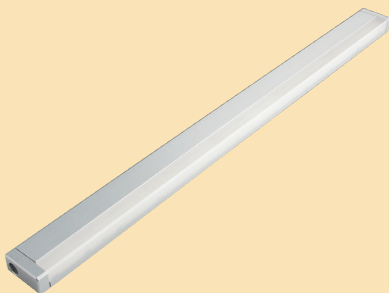


Schakelaar

Directverbinder



Extra te bestellen
Mini-stekker systeem

OMSCHRIJVING	LENGTE	° KELVIN	WATTAGE	CODE
LD 8010 A opbouwprofiel 230V	422 mm	3000° K	7,5 W	6348-8542
	523 mm	3000° K	9,50 W	6348-8552
	827 mm	3000° K	14,50 W	6348-8582
	927 mm	3000° K	16 W	6348-8592
LED opbouwprofiel.				
- Om op te bouwen. - Rijmontage met directverbinder (max. 10 ledlampen) - Optie: schakelmodule - Uitvoering: alu - Aansluiting: 230V	422 mm	4000° K	7,5 W	6348-8543
	523 mm	4000° K	9,50 W	6348-8553
	827 mm	4000° K	14,50 W	6348-8583
	927 mm	4000° K	16 W	6348-8593

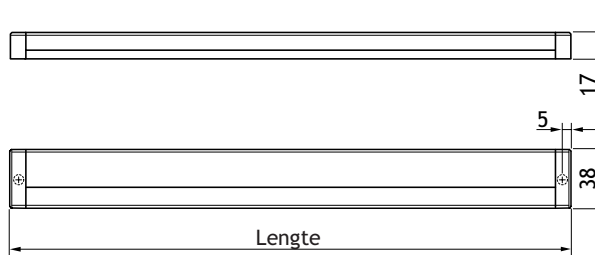

Optie		
Schakelaar	35 mm	6348-8400
Directverbinder	45 mm	6348-0010