

## CENTERLIFT 960HF incl. front - 238.0 x 118.0 cm

For worktop 240.0x120.0 cm

- Anodized Aluminum



Both tall and short people work in the kitchen and everyone needs different working heights. Moreover, different kitchen chores require different working heights. **CENTERLIFT 960H** creates a kitchen in which everyone can work comfortably while also providing a natural hub in the kitchen where people can gather, on an ordinary weekday or on festive occasions.

The lifting system can be integrated with kitchens from any kitchen manufacturer.

### Functions and advantages

- Motorised kitchen island lift
- Height-adjustable 70-110 cm above floor (excl. countertop)
- 200 kg lifting power
- The sides are adjustable sideways to suit the sink and hob
- Integrated safety switch

### Useful information

- Fittings for countertop enclosed
- Sink bowls with a maximum height of 120 mm can be integrated
- Electronics and motor system "Plug and Play"
- The position of the motors is adjustable to the side (then screwed into the floor)

### Standard equipment

- Factory-mounted aluminium system with movable brackets
- Floor-mounted motors
- Safety switch

### Article Info

**Art.no**  
960HF-240-06

**Description**  
CENTERLIFT 960HF incl. front - 238.0 x 118.0 cm  
For worktop 240.0x120.0 cm  
- Anodized Aluminum

**EAN**  
7340193113280

# Specifications

## Frame depth

1180 mm

## Frame width

1180 / 1380 / 1580 / 1780 / 1980 / 2180 / 2380 / 2580 / 2780 mm

## Depth worktop

1200 mm

## Width worktop

1200 / 1400 / 1600 / 1800 / 2000 / 2200 / 2400 / 2600 / 2800 mm

## Installation

Floor mounted

## Height adjustment

Motorised, steplessly adjustable 400 mm  
(700-1100 mm excl. top board)

## Speed level

30 mm/sec.

## Operation

Corded button or radio control

## Safety

The safety strip is placed under the frame. If anything touches the safety strip, the lifting unit stops

## Electrical connection

Plug for 230 V, 2 x 5A

## Plumbing connections

Connection is made with flexible hoses

## Lifting force

200 kg

## IP-class

IP 20

## Front height

103 mm

## Delivery modules

Worktop incl. safety switch, motors

## Fittings supplied

Bracket for fronts and top board

## Material


Aluminium frame

## Warranty

2 years Warranty

This product is covered by a 2-year warranty against manufacturing defects.

| Width (X)<br>Frame incl. front | Width (X)<br>Frame for own front | Width<br>Top board |
|--------------------------------|----------------------------------|--------------------|
| 1180 mm                        | 1148 mm                          | 1200 mm            |
| 1380 mm                        | 1348 mm                          | 1400 mm            |
| 1580 mm                        | 1548 mm                          | 1600 mm            |
| 1780 mm                        | 1748 mm                          | 1800 mm            |
| 1980 mm                        | 1948 mm                          | 2000 mm            |
| 2180 mm                        | 2148 mm                          | 2200 mm            |
| 2380 mm                        | 2348 mm                          | 2400 mm            |
| 2580 mm                        | 2548 mm                          | 2600 mm            |
| 2780 mm                        | 2748 mm                          | 2800 mm            |

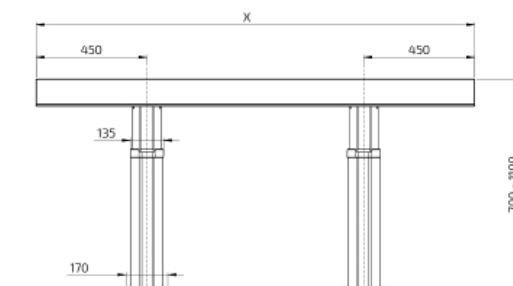

| Depth (Y)<br>Frame incl. front | Depth (Y)<br>Frame for own front | Depth<br>Top board |
|--------------------------------|----------------------------------|--------------------|
| 580 mm                         | 548 mm                           | 600 mm             |
| 780 mm                         | 748 mm                           | 800 mm             |
| 980 mm                         | 948 mm                           | 1000 mm            |
| 1180 mm                        | 1148 mm                          | 1200 mm            |

